




RAZR DRILL TRAINING

Module 1 : Scraper Adjustment

SCRAPER PLACEMENT

- First, use the two bolts on the scraper to adjust the blade placement against the disc.

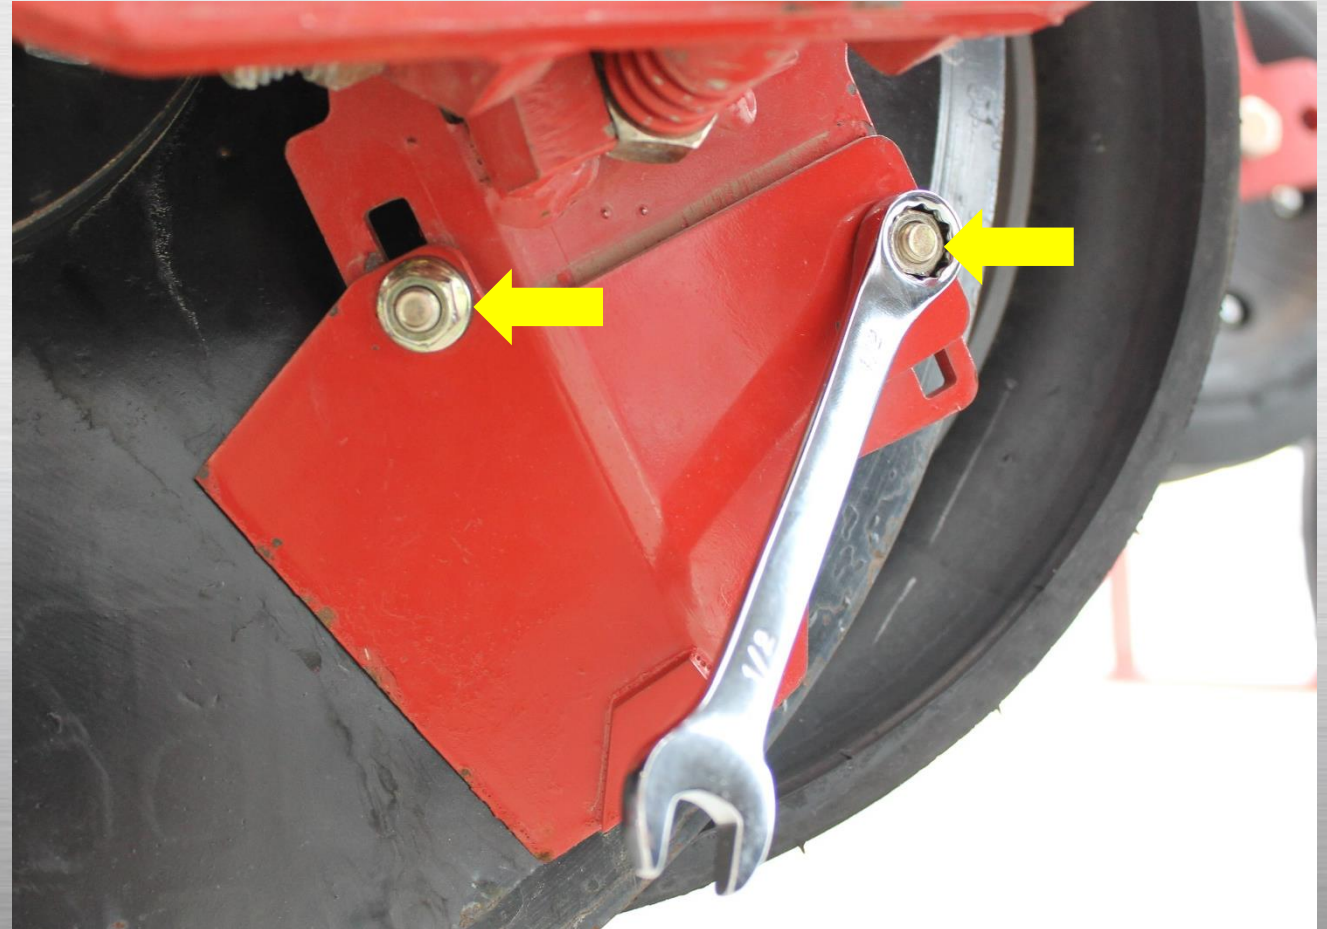


SCRAPER PLACEMENT

- Make sure that the scraper is in line with the bevel on the disc as shown:



SCRAPER PLACEMENT

- Also make sure that the scraper is flush against the disc with as little gap in between as possible.

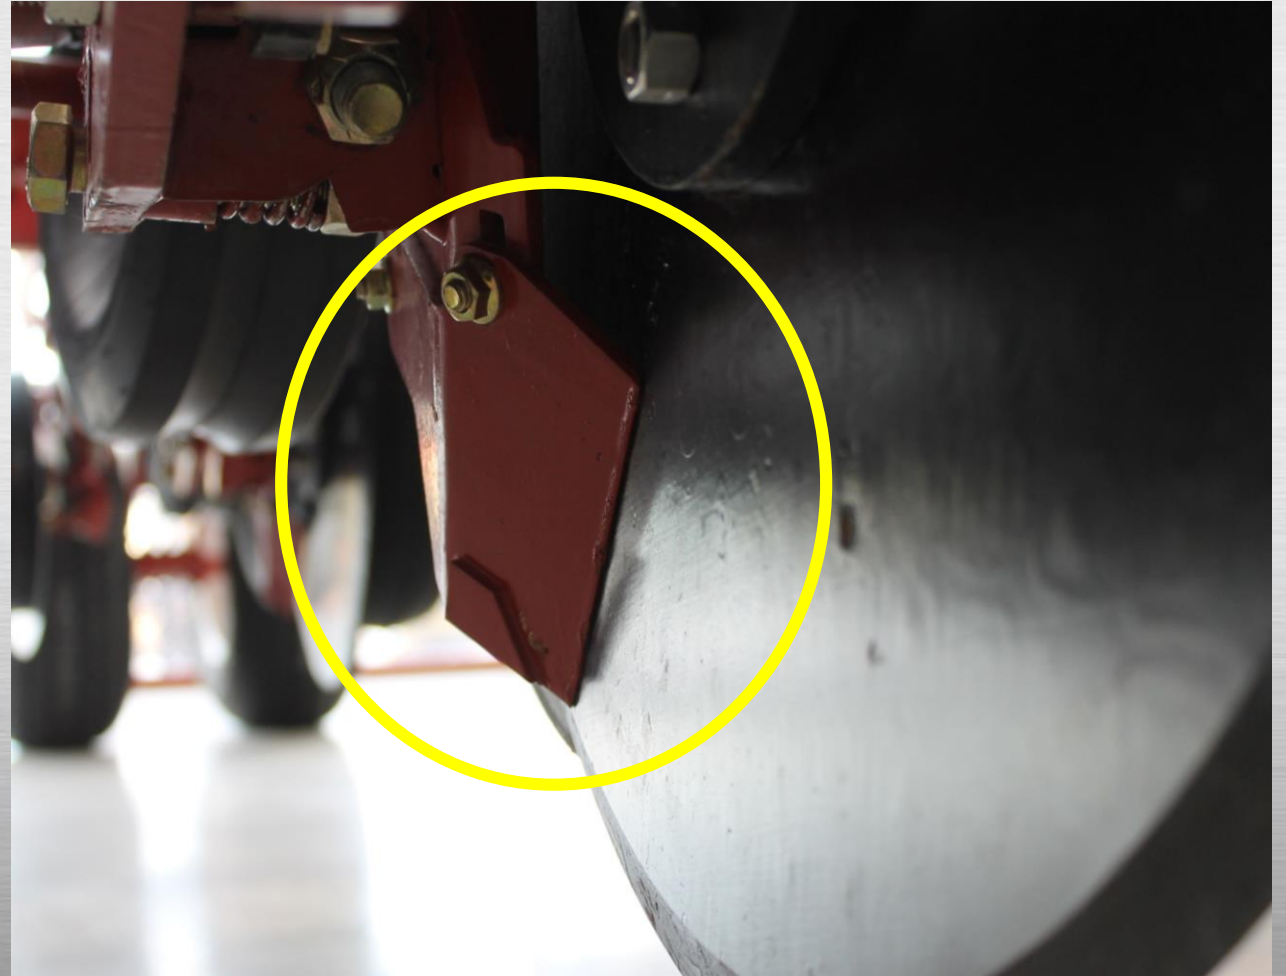

SCRAPER PLACEMENT

- Use the third bolt adjustment to tighten the scraper closer to the disc.



SCRAPER PLACEMENT

- After those adjustments, verify that the secondary hoses do not sit right against the edge of the disc as shown on the right.



SCRAPER PLACEMENT

- The picture instead shows a correct setting where the hoses are clear of the disc.



